

ASUS BE24WQLB


Business Monitor



Key Features



IPS technology is optimized for the finest image quality with 178° wide-viewing-angle



Frameless Design

Frameless panel design for an ideal multi display setup



DisplayPort

Extensive connectivity with DisplayPort, HDMI, D-sub, Audio in, Earphone jack



Flicker-free

ASUS Flicker-Free Technology clears out the distracting flicker, and brings viewing comfort.



Ultra-low Blue Light

Four levels of Blue Light Filter help users effectively reduce harmful blue light from the screen by tasks.



USB Hub

Embedded four USB 3.2 Gen 1 ports for connecting mouse, keyboard, or other USB devices



Stereo Speaker

Built-in 2W stereo speakers for audio experience



Wall Mountable

Compatible with VESA Wall Mount Standard (100 x 100 mm).



4-way Ergonomic Stand

Ergonomically-designed stand with tilt, swivel, pivot, and height adjustments









Specification

Display	Panel Size(diagonal)	24.1"(61.13 cm) Wide Screen (16:10)
	Display Viewing Area(HxV)	518.4 x 324.0 mm
	Panel Type/ Backlight	IPS/ WLED
	Display Surface	non-glare
	Color Saturation	100% sRGB
	True Resolution	1920 x 1200
	Pixel Pitch	0.270 mm
	Brightness (Max.)	300cd/m ²
	Contrast Ratio (Max.)	1000:1
	ASUS Smart Contrast Ratio(ASCR)	100,000,000:1
	Viewing Angle (CR _≥ 10)	178°(H)/178°(V)
	Display Colors	16.7 million
	Response Time	5ms (GTG)
Video Features	Splendid™ Video Intelligence Tech.	Yes
	Skin-Tone Selection	3 modes
	Color Temperature Selection	4 modes (Cool/Normal/Warm/User)
	HDCP	Yes
	QuickFit	Yes
Blue Light Filter	Yes	
Audio Features	Stereo Speaker	2W x 2 stereo, RMS
Input/ Output	HDMI, DisplayPort, D-Sub, Audio-in, Earphone jack, USB 3.2 Gen 1 ports (1up, 4 down)	
Mechanical Design	Chassis Colors	Black
	Tilt(angle)	Yes (+35° ~ -5°)
	Swivel(angle)	Yes (+90° ~ -90°)
	Pivot(angle/direction)	Yes (+90° ~ -90°)
	Height Adjustment	Yes (0~130mm)
	VESA Wall Mounting	100x100mm
Signal Frequency	Analog Signal Frequency	30 ~ 105 kHz(H)/ 49~75 Hz(V)
	Digital Signal Frequency	30 ~ 105 kHz(H)/ 49~75 Hz(V)
Power	Power Consumption	<13.3W *1
	Power Saving Mode	<0.22W
	Power Off Mode	0W(hard switch)
	Voltage	100–240V, 50 / 60 Hz
Security	Kensington lock	Yes
Dimension	Phys. Dimension (WxHxD)	533x(375~505)x211mm (with stand), 533x360x47mm(without stand)
	Box Dimension (WxHxD)	649 x474x192mm
Weight	Net weight: 6.1kg (with stand) , 3.9kg (without stand), Gross weight: 8.3 kg	
Accessories	Power cord(1.8m), VGA cable (1.8m) , DP Cable(1.8m), Audio cable(1.8m), USB cable(1.8m), Warranty card, Quick Start Guide, MiniPC Kit(optional)	
Compliance standards	FCC, UL/cUL, ICES-3, CB, CE, ErP, WEEE, TUV-GS, TUV-Ergo, ISO 9241-307, UkrSEPRO, CU, CCC, CEL, CECP, BSMI, RCM, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, e-Standby, Energy Star, TCO, RoHS, CEC, WHQL Windows 7/8.1/10	

*1: measuring a screen brightness of 200 nits without audio/ USB/ Card reader connection

*All specifications are subject to change without notice.

Outline Dimension

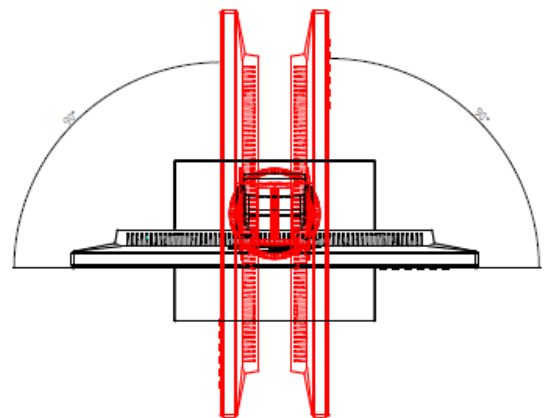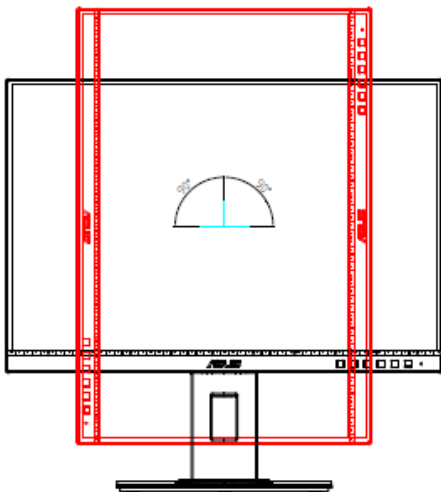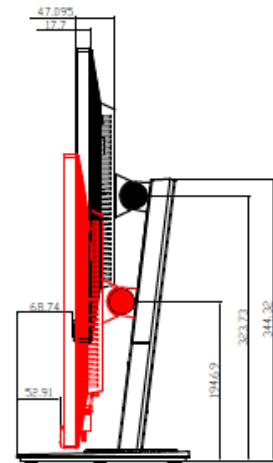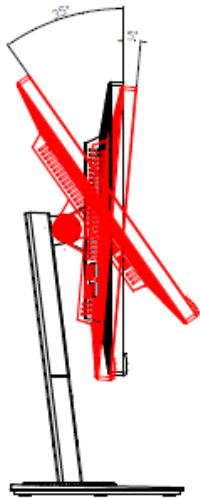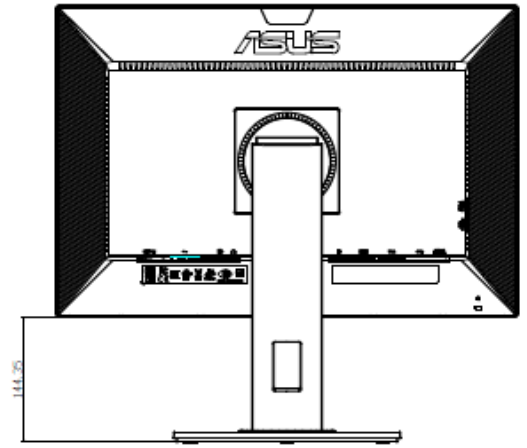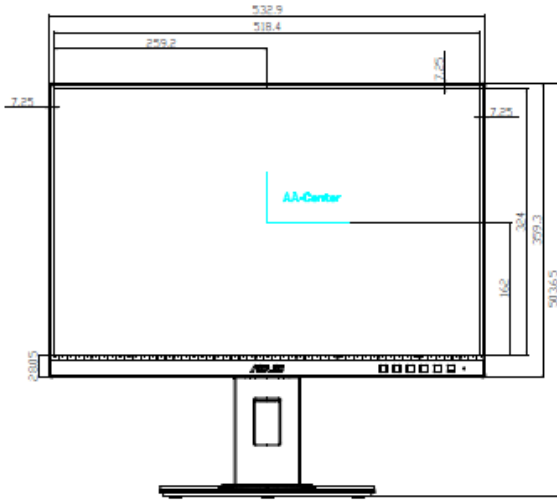

*Unit: mm(inch)