

# ProArt Display PA279CRV



## Key Features



4 times the resolution of full HD 1080p with HDR-10 for stunning details and image quality



IPS technology is optimized for the finest image quality with 178° wide-viewing-angle



provides brighter imagery and supports the cinema-standard 99% DCI-P3 color gamut



Designed to encompass most of the colors achievable on CMYK color printers



Factory pre-calibrated to guarantee the  $\Delta E < 2$  color difference less than 2



Full function USB-C connection for DisplayPort video, USB data transmission and supports 96W power delivery



Daisy-chain

DisplayPort allows users to daisy chain up to 4 monitors for a multi-display workstation from one video source



USB Hub

Embedded four USB ports for connecting mouse, keyboard, or other USB devices

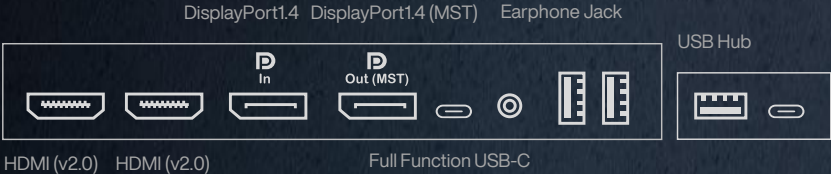


4-way Ergonomic Stand

Ergonomically-designed stand with tilt, swivel, pivot, and height adjustments

# ProArt Display PA279CRV

## Spec Sheet

|                            |  |
|----------------------------|--|
| <b>Display</b>             | <p>Panel Size : 27-inch (68.47cm) Wide Screen (16:9)<br/>         Display Viewing Area(HxV) : 596.73 x 335.66 mm<br/>         Display Surface : Non-Glare<br/>         Panel Type : IPS<br/>         Viewing Angle (CR≥10, H/V) : 178° / 178°<br/>         Pixel Pitch : 0.155 mm<br/>         Resolution : 3840x2160<br/>         Color Space (sRGB) : 100%<br/>         Color Space (Rec. 709) : 100%<br/>         Color Space (Adobe RGB) : 99%<br/>         Color Space (DCI-P3) : 99%<br/>         Brightness (Typ.) : 300cd/m<sup>2</sup><br/>         Brightness (HDR, Peak) : 400cd/m<sup>2</sup><br/>         Contrast Ratio (Dynamic) : 3000:1<br/>         Contrast Ratio (Typ.) : 1000:1<br/>         Display Colors : 1073.7M (10 bit)<br/>         Response Time : 5ms (GTG)<br/>         Refresh Rate (Max) : 60Hz<br/>         HDR (High Dynamic Range) Support : HDR-10<br/>         Flicker-free : Yes</p> |
| <b>Video Feature</b>       | <p>ProArt Preset :<br/>         Native / sRGB / Rec. 709 / DCI-P3 / Adobe RGB / Rec. 2020 / DICOM / HDR / User Mode 1 / User Mode 2<br/>         Color Temp. Selection : Yes (5 modes)<br/>         Color Adjustment : 6-axis adjustment (R,G,B,C,M,Y)<br/>         Gamma adjustment : Yes (Support Gamma 1.8/2.0/2.2/2.4/2.6)<br/>         Color Accuracy : ΔE&lt; 2<br/>         ProArt Palette : Yes<br/>         PiP/PbP : Yes<br/>         QuickFit : Yes (Paper / Alignment Grid / Ruler)<br/>         HDCP : Yes, 2.2<br/>         VRR Technology : Adaptive-Sync (48~60Hz)<br/>         Low Blue Light : Yes</p>   |
| <b>Audio Feature</b>       | <p>Speaker : Yes (2Wx2)</p>  |
| <b>IO ports</b>            | <p>USB-C x 1<br/>         DisplayPort 1.4 x 2 (Daisy Chain)<br/>         HDMI(v2.0) x 2<br/>         USB-C Power Delivery : 96W</p> <p>USB Hub :<br/>         Yes (USB 3.2 Gen 1 Type-C; USB 3.2 Gen 1 Type-A x 3)<br/>         Earphone Jack : Yes</p>  <p>DisplayPort1.4    DisplayPort1.4 (MST)    Earphone Jack    USB Hub</p> <p>HDMI (v2.0)    HDMI (v2.0)    Full Function USB-C</p>  |
| <b>Signal Frequency</b>    | <p>Digital Signal Frequency : 15~135 KHz (H) / 48~60 Hz (V)</p>  |
| <b>Power Consumption</b>   | <p>Power On (Typical): &lt; 26.14W<br/>         Power Saving Mode : &lt; 0.5W ; Power Off Mode : 0W (Hard Switch)<br/>         100-240V, 50/60Hz</p>   |
| <b>Mechanical Design</b>   | <p>Tilt : Yes (+23° ~ -5°)<br/>         Swivel : Yes (+30° ~ -30°)<br/>         Pivot : 90° (Clockwise &amp; Anticlockwise)</p> <p>Height Adjustment : 0~130mm<br/>         VESA Wall Mounting : 100x100mm<br/>         Kensington Lock : Yes</p>  |
| <b>Dimensions (Est.)</b>   | <p>Phys. Dimension with Stand (W x H x D) : 612.22 x (408.11~538.11) x 215 mm<br/>         Phys. Dimension without Stand (W x H x D) : 612.22 x 362.89 x 44.1 mm<br/>         Box Dimension (W x H x D) : 691 x 427 x 138 mm</p>   |
| <b>Weight (Est.)</b>       | <p>Net Weight with Stand : 5.78 Kg<br/>         Net Weight without Stand : 4.07 Kg<br/>         Gross Weight : 8.69 Kg</p>   |
| <b>Accessories</b>         | <p>Power cord, USB-C cable (optional), HDMI cable (optional), DisplayPort cable (optional), Calibration Report, Quick Start Guide, Warranty Card, Welcome Card</p>   |
| <b>Compliance Standard</b> | <p>cTUVus, CB, CE, ErP, WEEE, TUV-GS, TUV-Ergo, CCC, CEL, CECP, BSMI, AU MEPS, VCCI, PSE, PC Recycle, J-MOSS, KC, KCC, SDoC, e-Standby, PSB, VN MEPS, Energy Star, TCO, RoHS, CEC, WHQL Windows 10/11, EPEAT Gold, TÜV Flicker Free, TÜV Low Blue Light, VESA DisplayHDR 400, VESA MediaSync Display, Calman Verified, Mac compliance</p>  |

\*Power consumption is measured with screen brightness of 200 nits without audio / USB / or other peripheral connections drawing power.

\*\*All specifications are subject to change without notice

