

ASUS ProArt PA329C

4K HDR Professional Monitor



Low Blue Light
& Flicker Free

Key Features



4 times the resolution of full HD 1080p with HDR for stunning details and image quality



IPS technology panel is optimized for the finest image and color quality with 178° wide-viewing-angle



USB Type-C Monitor

USB-C connection for DisplayPort, USB data transmission and supports 60W power delivery



Support the color space standard of Digital Cinema Industry



Designed to encompass most of the colors achievable on CMYK color printers



Support the color space standard of Ultra High-Definition Television (UHDTV)



Factory pre-calibrated with ASUS advanced gray-scale tracking technology to guarantee the ΔE color difference value is less than 2



ProArt Calibration Technology

ASUS ProArt™ Calibration Technology to ensure color accuracy during different using scenarios

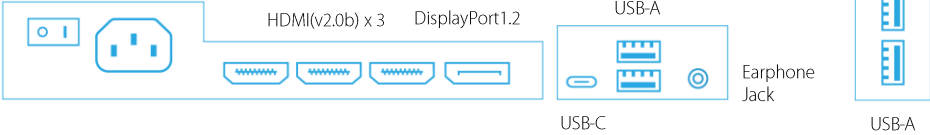


4-way Ergonomic Stand

With an ergonomically-designed stand with tilt, swivel, pivot, and height adjustments



Specification

Display	<p>Panel Size : 32-inch (81.28cm) Wide Screen (16:9) Display Viewing Area(HxV) : 708.48mm (H) x 398.52mm (V) True Resolution : 3840 x 2160 Pixel Pitch : 0.1845 x 0.1845 mm Display Colors : 1073.7M (10 bit) Color Saturation : 98% DCI-P3, 100% Adobe RGB, 100% sRGB and 84% Rec.2020 Brightness : 400 cd/m² (Typical), 600 cd/m² (Peak) Contrast Ratio: 1000:1 (Typical), 1,000,000:1 (HDR) Viewing Angle (CR\geq10) : 178°(H)/178°(V) Response Time : 5ms (GTG) Flicker-free : Yes Dynamically Local Dimming: Yes</p>		
Video Feature	<p>Trace Free Technology : Yes ProArt Preset : 9 modes (Standard / sRGB / Adobe RGB / DCI-P3 / DICOM / HDR_PQ Rec2020 / User mode1 / User mode2) Color Accuracy : $\Delta E < 2$ ASUS ProArt Hardware Calibration : Yes Gamma Adjustment : Yes (Support Gamma 2.6, 2.4, 2.2, 2.0, and 1.8) Color Adjustment : 6-axis (R, G, B, C, M, Y) Color Temperature Selection : 4 modes QuickFit : 5 modes (Paper / Alignment Grid / Ruler / Customization Modes) Picture-in-Picture/ Picture-by-Picture : Yes (PIP x 2, PBP x 2 with 2 Color Gamut Selection) HDCP support : Yes, 2.2 HDR support : Yes, HDR-10 Adaptive-Sync support: Yes, 45-65Hz</p>		
Audio Features	3W x 2 stereo, RMS		
I/O Ports	<p>Signal Input : DisplayPort1.2 x 1 HDMI(v2.0) x 3 USB-C™ x 1 USB-C Power Delivery : 60W</p>	<p>USB Hub: 5x USB 3.2 Gen 1 Type-A</p> <p>Earphone Jack : Yes (3.5mm Mini-jack)</p>	Left Side
		Earphone Jack	USB-A
Signal Frequency	Digital Signal Frequency : 30~135KHz(H)/ 24~76Hz(V)		
Power Consumption	<p>Power On (Typical): < 56.84W* Power Saving Mode : < 0.5W ; Power Off Mode : 0W (Hard Switch) 100-240V, 50/60Hz</p>		
Mechanical Design	<p>Chassis Colors : Black Tilt : +20° ~ -5° Swivel : +45° ~ -45°</p>	<p>Pivot : 90° (Clockwise) Height Adjustment : 0 ~ 130 mm VESA Wall Mounting : 100 x 100 mm</p>	
Security	Kensington lock		
Dimensions	<p>Phys. Dimension with Stand (WxHxD) : 735 x (485~615) x 240 mm Phys. Dimension without Stand (WxHxD) : 734.4 x 431 x 66.85 mm Box Dimension (WxHxD) : 847 x 552 x 350 mm</p>		
Weight	Net Weight (Esti.) : 12.32 kg, Without Stand: 8.7 Kg, Gross Weight (Esti.) : 16.7 kg		
Accessories	Power cord, USB-C cable, USB-C to USB-A cable, DisplayPort cable, HDMI cable, Calibration Report, Quick Start Guide, Warranty Card		
Compliance Standard	UL/cUL, CB, CE, ErP, FCC, CCC, BSMI, CU, C-Tick, VCCI, TUV-GS, ISO-9241-307, PSE, J-MOSS, RoHS, WEEE, Windows 7 and 8 WHQL, Mac Compliance, KC, KCC, eStandby, TÜV Flicker-free, TÜV-Low Blue Light		

*measuring a screen brightness of 200 nits without audio / USB / Card reader connection

**All specifications are subject to change without notice.